

COMPACT ENCLOSURES

ARES SOLID DOOR, without MOUNTING PLATE




- Material** : Enclosure and parts, door : 1,00 – 1,50 mm mild steel
- Surface Process** : Mild Steel Parts : Iron-phosphate plated, RAL7035 Rough Epoxy, polyester powder-coating
- IP Rate** : IP 66, (EN 60 529)
- Supply Includes** : 1 pcs body, 1 set bottom-top lid, 1 pcs front door, 2 pcs door support rail, 1 pcs door key.

Please see page 268 for technical drawings.

ACCESSORIES:

Knitted Earthing Cable p.: 91

Wall Bracket p.: 91

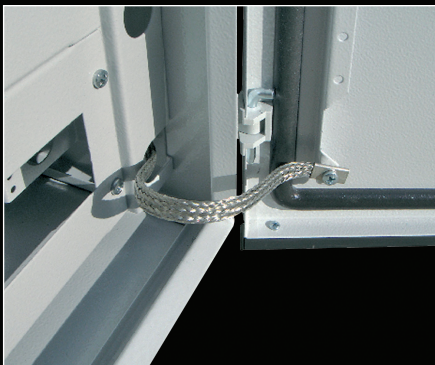

Other Accessories p.: 86 include support rails.

ARES SOLID DOOR, without MOUNTING PLATE

PRODUCT CODE	WIDTH (W)	HEIGHT (H)	DEPTH (D)	LOCK	HINGE	WEIGHT (kg)
ARES 101.350	300	400	150	1	2	4,8
ARES 101.351	300	400	200	1	2	5,4
ARES 101.352	400	400	200	1	2	6,7
ARES 101.353	400	500	200	1	2	8,3
ARES 101.354	400	600	200	2	2	9,3
ARES 101.355	400	600	280	2	2	10,8
ARES 101.365	500	500	200	1	2	8,1
ARES 101.366	500	500	280	1	2	9,4
ARES 101.356	500	600	200	2	2	11,5
ARES 101.357	500	700	200	2	2	12,7
ARES 101.358	500	700	280	2	2	15
ARES 101.359	600	800	200	2	3	16,2
ARES 101.360	600	800	280	3	3	18,4
ARES 101.361	600	1000	280	2	3	25,5
ARES 101.362	600	1150	280	3	3	36
ARES 101.367	800	800	200	2	2	15,2
ARES 101.368	800	800	280	2	2	16,3
ARES 101.363	800	800	280	2	2	32,3
ARES 101.364	800	1150	280	2	2	36,6

