

## KMT-1000 AND KMT-2000 STAINLESS CONTROL DESKS



**Material** : Body, panels: 1,50 mm 304 stainless steel  
Plinth corner: 2,00 mm 304 stainless steel  
Bottom panel: 1,50 mm 304 stainless steel  
Mounting panel: 2,00 mm galvanized steel


- Please contact the customer service for 316 steel sheet application or varnish-coated surface process.
- Please see page 287-288 for technical drawings.

**Surface process** : Natural stainless surface application


**IP Rate** : IP 55

**Supply includes** : **For KMT-1000:** 1 pcs back-closed main body, 1 pcs top panel with damper, 1 pcs bottom door, gland plate with foam, 1 pcs mounting plate, 1 set of 100mm plinth

**For KMT-2000:** 1 pcs open-back main body, 1 pcs top panel with damper, 1 pcs bottom door, 1 pcs rear door, gland plate with foam, 2 pcs mounting plate.

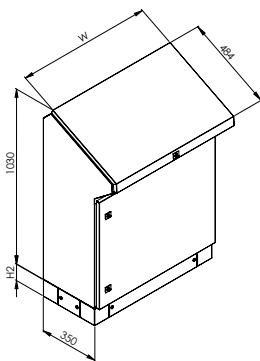

KMT-1000 (Closed rear)

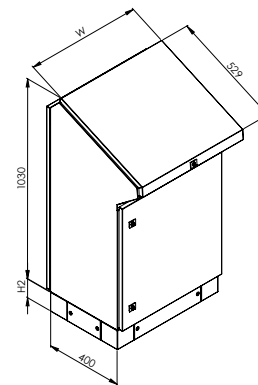

KMT-2000 (Opened rear)

PRODUCT CODE	ENCLOSURE WIDTH (mm)	DOOR TYPE
516.350.K	600	SINGLE
518.350.K	800	SINGLE
510.350.K	1000	DOUBLE
512.350.K	1200	DOUBLE

PRODUCT CODE	ENCLOSURE WIDTH (mm)	DOOR TYPE
526.400.K	600	SINGLE FRONT + SINGLE REAR
528.400.K	800	SINGLE FRONT + SINGLE REAR
520.400.K	1000	DOUBLE FRONT + DOUBLE REAR
522.400.K	1200	DOUBLE FRONT + DOUBLE REAR