

ARES SOLID DOOR with MOUNTING PLATE




- Material** : Enclosure and parts, door : 1,00 - 1,50 mm mild steel
Mounting plate : 1,50 - 2,00 mm Galvanized steel
- Surface Process** : Mild Steel Parts : Iron-phosphate plated, RAL7035
Rough Epoxy, polyester powder-coating
Mounting Plate : Galvanized
- IP Rate** : IP 66, (EN 60 529)
- Supply Includes** : 1 pcs body, 1 set bottom-top lid, 1 pcs front door,
2 pcs support rails, 1 pcs door key, 1 pcs mounting plate

Please see page 268 for technical drawings.

ACCESSORIES:

Knitted Earthing Cable p.: 91

Wall Bracket p.: 91

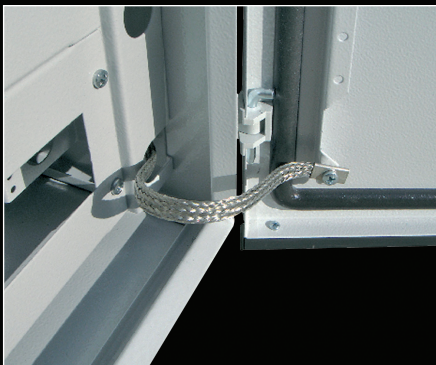

Other Accessories p.: 86

ARES SOLID DOOR with MOUNTING PLATE

PRODUCT CODE	WIDTH (W)	HEIGHT (H)	DEPTH (D)	W2 (mm)	H2 (mm)	LOCK	HINGE	WEIGHT (kg)
101.250*	300	400	150	249	334	1	2	5,5
101.251*	300	400	200	249	334	1	2	6
101.252*	400	400	200	349	334	1	2	7,5
101.253*	400	500	200	349	414	1	2	9
101.254	400	600	200	349	534	2	2	10,5
101.255	400	600	280	349	534	2	2	11,8
101.265	500	500	200	449	434	2	2	11,4
101.266	500	500	280	449	434	2	2	13,4
101.256	500	600	200	449	534	2	2	13,1
101.257	500	700	200	449	634	2	2	14,9
101.258	500	700	280	449	634	2	2	16,5
101.259	600	800	200	549	734	2	2	19,5
101.260	600	800	280	549	734	2	2	21,3
101.261	600	1000	280	549	934	2	3	34,1
101.262	600	1150	280	549	1084	3	3	36,4
101.267	800	800	200	749	734	2	2	24,6
101.268	800	v800	280	749	734	2	2	27,9
101.263	800	1000	280	749	934	2	3	40,7
101.264	800	1150	280	749	1084	3	3	46,1

* Marked codes do not include support rails.

